




## Specification

|   |  |
|---|--|
| <b>Model</b>                                | KP CR60 Conventional Rotator Set (Drive and Idler)   |
| <b>Safe Working Load - Drive Unit</b>       | 30 tonne   |
| <b>Safe Working Load - Idler Unit</b>       | 30 tonne   |
| <b>Maximum Load Carrying Capacity - Set</b> | 60 tonne (1 Drive & 1 Idler)   |
| <b>Rotation Capacity, Drive Unit</b>        | 90 tonne   |
| <b>Wheel Centre Distance</b>                | 27.5, 43.3, 59, 74.8, 90.5, 106.2, 122in (700, 1100, 1500, 1900, 2300, 2700, 3100mm)                 |
| <b>Vessel Diameter Capacity</b>             | 22.4in to 267.7in (570mm to 6800mm)  |
| <b>Rotation Speed Range</b>                 | 5.1 to 51.1 in/min (130 to 1300 mm/min)  |
| <b>Tyre Type</b>                            | Polyurethane, 95A durometer shore rating   |
| <b>Wheel Size</b>                           | 20.5in diameter x 14in wide (521mm x 356mm)  |
| <b>Overall Height to Top of Tyre</b>        | 30.1in (765mm)   |
| <b>Remote Pendant Type</b>                  | Plug & Socket Five Push Button Control (forward/stop/reverse/speed control/e-stop), 50ft (15m) cable |
| <b>Rotation Drive Motors</b>                | 2 x 1.5kW  |
| <b>Primary Input Power</b>                  | 380 to 480 V, 3 Phase, 50/60Hz   |
| <b>Input Current at Rated Load</b>          | 12.1amp  |
| <b>Overall Length &amp; Width - Drive</b>   | 140.5in x 34.6in (3570mm x 880mm)  |
| <b>Overall Length &amp; Width - Idler</b>   | 140.5in x 27.7in (3570mm x 705mm)  |
| <b>Weight - Drive</b>                       | 4519lb (2050kg)  |
| <b>Weight - Idler</b>                       | 2756lb (1250kg)  |

**Drive Rotator**

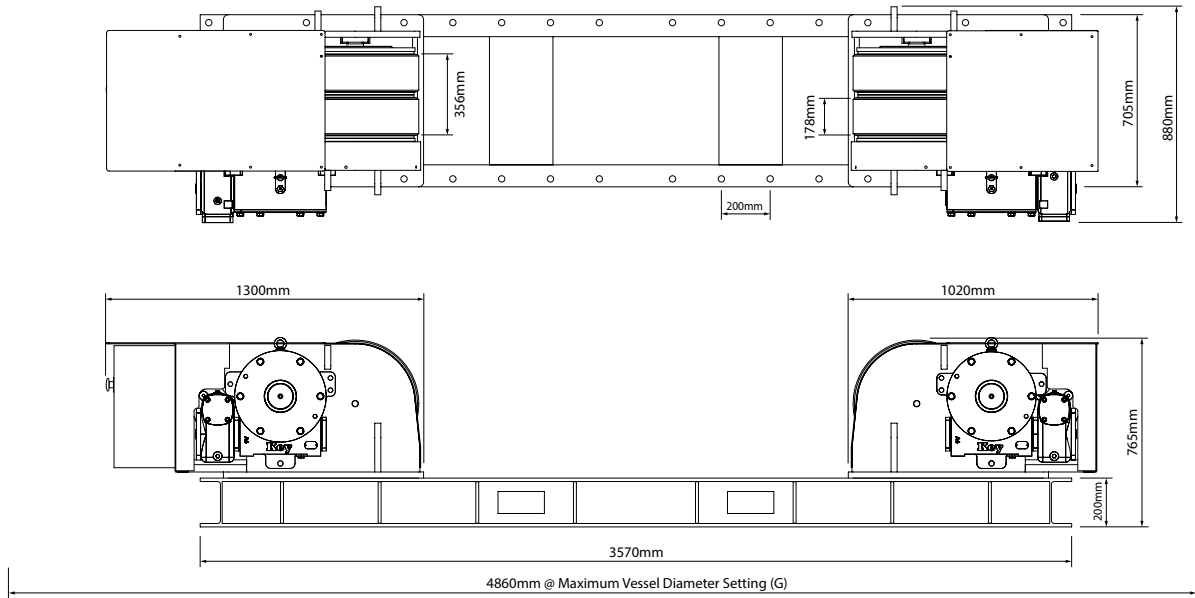

**Idler Rotator**

